Serge Ferrari
industries

Protect

Cover 705





Protect Cover 705


The market reference for a multipurpose technical cover

Main advantages


- Excellent lifespan
- High UV resistance
- Wide range of colours
- Long dimensional stability thanks to Precontraint® technology

Main applications

- Wide range of applications
- Truck covers
- Flexible roll-up doors
- Wintering solutions

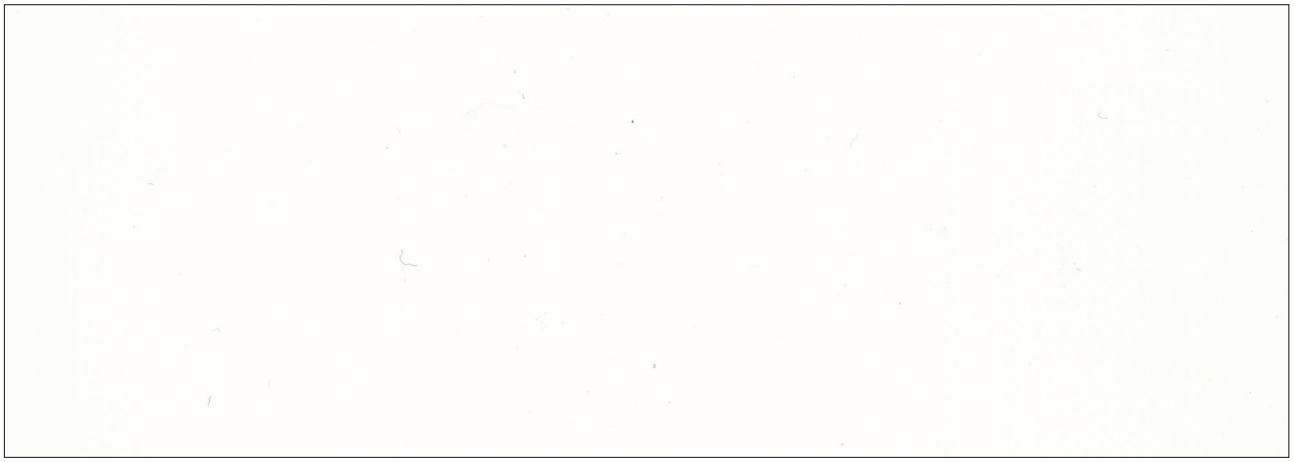

Traffic white RAL 9016 **705-1066**

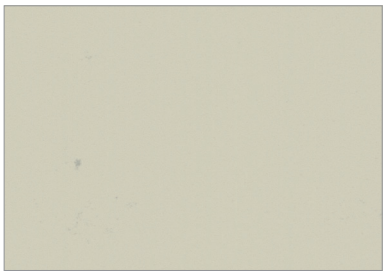

Oyster white RAL 1013 **705-50076***



Light ivory RAL 1015 **705-1076**



Zinc yellow RAL 1018 **705-1059***



Pure orange RAL 2004 **705-1063***



Cola red **705-1064***




Carmine red RAL3002 **705-1065**



Sky blue RAL 5015 **705-1053***



Gentian blue RAL 5010 **705-1052***

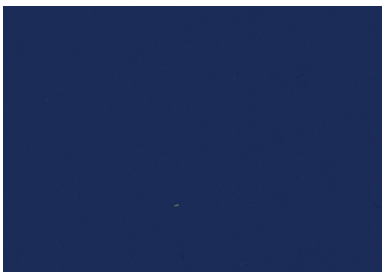

Ultramarine blue RAL 5002 **705-1051**

Serge Ferrari
industries



Moss green **705-50201**
RAL 6005



Opal green **705-1055**
RAL 6026



Chocolate brown **705-50072***
RAL 8017



Light grey **705-1069**
RAL 7035



Agate grey **705/1071**
RAL 7038



Window grey **705-1072**
RAL 7040



Dusty grey **705-1070**
RAL 7037



Anthracite grey **705-1074**
RAL 7016




Jet black **705-1075**
RAL 9005

***** Standard colors subject to lead time

Exclusive Précontraint® technology

This unique, world-patented technology involves maintaining the composite in bi-axial tension throughout the manufacturing cycle. It ensures our materials' exceptional performance characteristics, which ensure they exceed market standards in terms of long-term stability, strength, coating thickness and flatness.

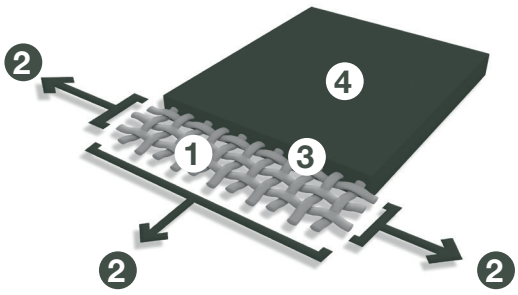

1	**High-tenacity polyester micro-yarn reinforcing mesh**	Higher resistance to elongation and tearing
2	**Coating under bi-axial, warp and weft tension**	No deformation during installation and usage
3	**Coating thickness covering top of yarns and dirt repellent surface treatment**	Enhanced aesthetic and structural durability
4	**Extremely flat and thin**	Easy-to-clean smooth surface ensuring compactness and easy rolling

Protect Cover 705

	Technical properties
Yarn	1100 dtex PES HT
Coating	PVC
Finish	Acrylic varnish both sides
Coating at top of yarns	0.26 mm • 260 microns
Total thickness	0.57 mm • 570 microns
Weight EN ISO 2286-2	670 g/m² • 19.8 oz/sq. yd
Width EN ISO 2286-1	270 cm • 106.3 in
Roll length	Rolls: 30 lm • 32.81 yd - Jumbo rolls: 350 lm • 382.76 yd
	Physical properties
Tensile strength (warp/weft) EN ISO 1421	250/250 daN/5 cm • 562/562 lbs/2 in.
Tear strength (warp/weft) DIN 53.363	25/25 daN • 56/56 lbs
Extreme working temperatures DIN EN 1876-1	-30°C/+70°C • -22°F/+158°F
	Environmental properties
Carbon impact EN 15804 + A2	2.80 kg CO_2 eq./m²
	Management system
	Quality: ISO 9001 • **Environment**: ISO 14001 • **Energy**: ISO 50001
	Certifications, labels
	Précontraint® Technology

[1] Summarizes the group's CSR project focused on human, to align economic performance and positive impact.

The technical data above are average values with a +/-10% tolerance.

The purchaser of our products is responsible for their application or transformation in relation to possible third party rights. The purchaser of our products is responsible for their installation in compliance with the standards, working practices and safety regulations of their destination country. Please refer to our warranty document with regard to contractual liability.
Values quoted in this document are commonly used test results for design purposes. They are given for information only in order to offer our customers optimum usage of our products. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.

The colours and textures presented are included for information only.

Précontraint is a Serge Ferrari SAS registered trademark.
Ref. CT-02043 • 08/2026 • PDF ONLY

EN

Photo Credits: ©SergeFerrari

Serge Ferrari group

sergeferrarigroup.com